


# BXFMSA-70M-SCCT – Crystal Filter

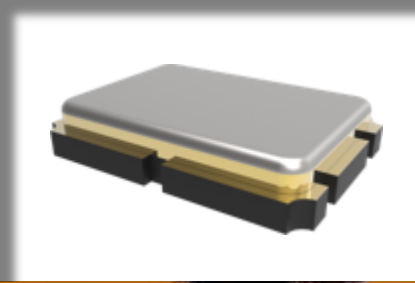

## FEATURES

- ✓ Extended operating range (-40° to 85°C)
- ✓ SMD Construction
- ✓ 7.0x5mm Package


## Monolithic Crystal Filter

#blileytakesyoufurther

### Description

Bliley Crystal Filters are designed to perform reliably under demanding environmental conditions. Bliley rigorous Quality Control Standards provides the framework to provide consistent lot to lot product performance. Bliley Crystal Filters are utilized in applications consisting of: Avionics, Instrumentation, Military, SATCOM and DATACOM. Bliley can provide both discrete and monolithic topology solutions.

### Block Diagram

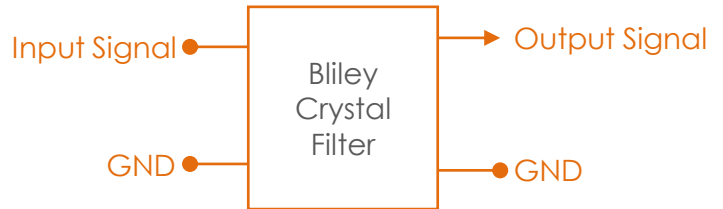

### Part Number Configuration

**BXFMSA – 70M – S C C T**

<b>Center Frequency</b> 70MHz	<b>Bandwidth</b> S: Special ±12kHz	<b>Operating Temperature</b> C: -40°C to +85°C	<b>Termination Impedance</b> C: Natural
----------------------------------	--	---	--

**DISCLAIMER:** All changes to the product(s) and or information contained herein are subject to Bliley Technologies' Product Change Notification process. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.


## Performance Specifications

Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
General		MIN	TYP	MAX	
Center Frequency	Fundamental		70		MHz
Bandwidth	@1dB	±8.35			kHz
	@3dB	±12			kHz
	@35dB			±35	kHz
Amplitude Ripple	In passband			2.0	dB
Insertion Loss	In passband			6.0	dB
Stop Band	70.4 - 71 MHz	40			dB
	69.1MHz	70			dB
Max Input Level	Operating	-10	0		dBm
Termination Impedance	Z <sub>in</sub> = Z <sub>out</sub>		850		Ω
			1.0		pF
Moisture	1				

## Environmental Compliance


Parameter	Conditions	Values			Unit
		MIN	TYP	MAX	
Operating Temp Range		-40		+85	°C
Storage Temp Range		-40		+85	°C
Shock	MIL-STD-202, Method 213 Test Condition A				
Solderability	MIL-STD-202, Method 208				

## Measurement Circuit

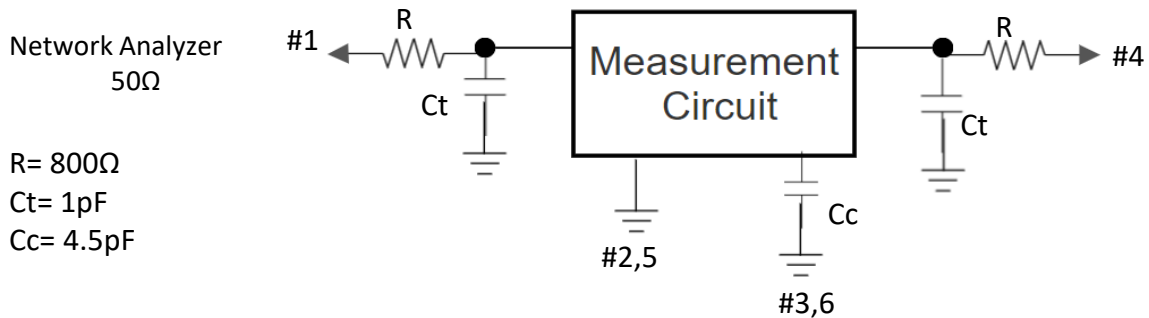

**DISCLAIMER:** All changes to the product(s) and or information contained herein are subject to Bliley Technologies' Product Change Notification process. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.

# Physical Specifications

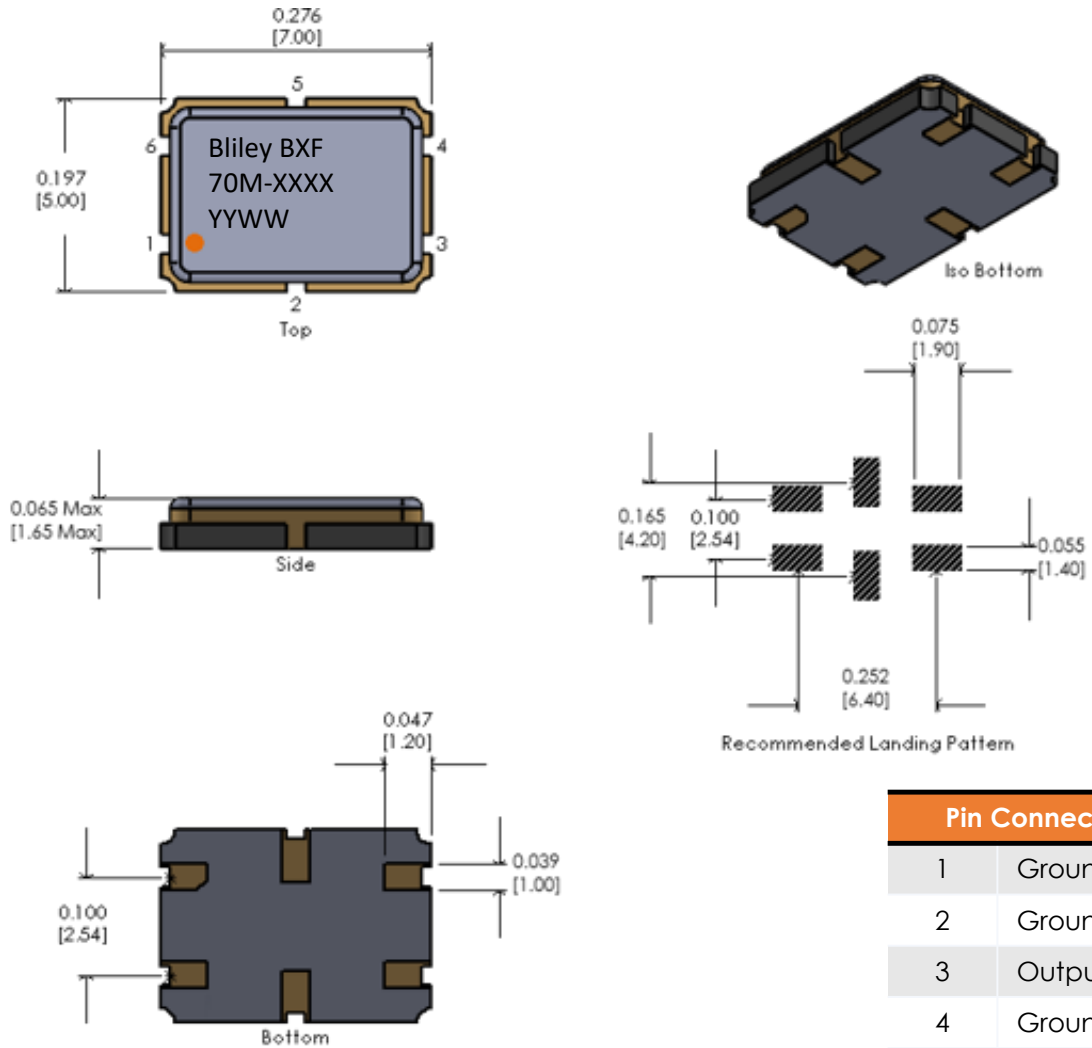


Pin Connections	
1	Ground
2	Ground
3	Output
4	Ground
5	Ground
6	Input

Tolerances (mm) .X = ± 0.5, .XX = ±0.2 unless otherwise specified

Notes:

## Tape and Reel

Embossed Carrier Dimensions (8mm, 12mm, 16mm, 24mm Tape Only)

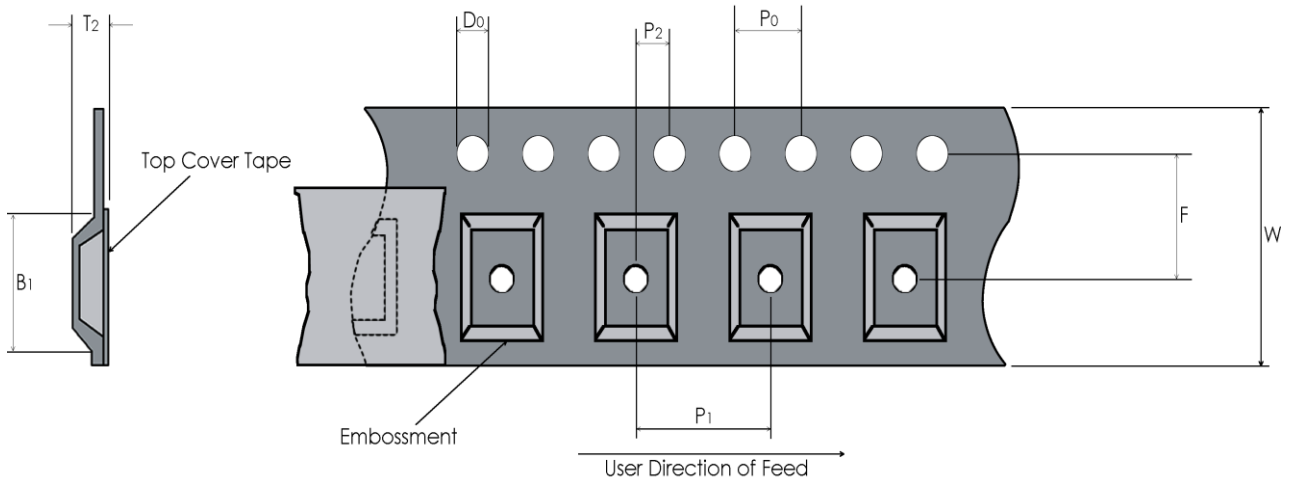

Tape Dimensions (mm)				Reel Dimensions (mm)					
W	F	Do	Po	P1	P2	B1	T2	Outside Dia.	Parts / Reel
16	7.5	1.5	4	8	2	7.3	1.8	180	1000

## Recommended Reflow Profile

**Reflow Profile:** in accordance to IPC/JEDEC J-STD-020 (Latest Revision)

**Additional Notes:**

- This part has been designed for pick and place reflow soldering
- This part may be reflowed once
- This part should not be reflowed in the inverted position

## Packaging

**Packaging:** All packaging must conform to ESD Controls detailed in ANSI/ESD S20.20 (Latest Revision)

DISCLAIMER: All changes to the product(s) and or information contained herein are subject to Bliley Technologies' Product Change Notification process. No liability is assumed as a result of their use or application. No intellectual property rights accompany the sale or delivery of any such product(s) or information.